


Cirio Chandelier

Antoni Arola, 2015

Hanging lamps




Cirio Chandelier S




S

Cirio Chandelier M



M

Cirio Chandelier L



L

The Cirio family has grown with a new version of Chandelier. A compact and decorative design, repeatable to Versaillesque proportions, that radiates its warm LED candlelight to create an ambience in large spaces.

GENERAL DESCRIPTION

Capsule with LED module, translucent white diffuser and heat sink with black matte finish.

3 lampshade options: white porcelain, polished brass and white opal glass.

Black aluminium circular structure.

(S) ø 100 cm / 39.4" for 20 lampshades

(M) ø 130cm / 51.2" for 30 lampshades

(L) ø 160 cm / 63" for 40 lampshades

Black metal circular ceiling plate + power supply adjustable

(dimming system 1-10V / DALI).

Suitable for Outlet Box (UL Market).

Electric cable length: 5 m / 196.8"

LIGHT SOURCE

(S) Cirio Chandelier S

20 x Module of 4 LEDs

Power system: 114 W

(M) Cirio Chandelier M

30 x Module of 4 LEDs

Power system: 171 W

(L) Cirio Chandelier L

40 x Module of 4 LEDs

Power system: 228 W

(S / M / L)

LED Power: 5,7 W

Operating current: 530 mA

T^a Colour: 2.700 K

Typical CRI: 83

Lifetime: 40.000 h

Built-in adjustable LED.

Lamp suitable for dimming 1-10V. / DALI

Not included external dimmer switch 1-10V. / DALI

Energy efficiency class (E.E.C): A++... A+.

Lamp suitable only for indoor use.

Always use this light source.

Input voltage: 120 ~ 277 Vac.

(50Hz / 60Hz) According to destination.

*UL Market: They have been tested with UL certification with an Input Voltage (Vac) of 120V and 277V.

Luminous performance with lampshade:

- White porcelain: 29%
- Polished brass: 29.3%
- White opal glass: 87%

APPROXIMATE WEIGHT (unpacked)

(Weight with porcelain lampshade):

(S) 25 Kg / 55 lb

(M) 35 Kg / 77 lb

(L) 50 Kg / 110 lb

- Porcelain lampshade: 0,5 kg / 1.1 lb

- Brass lampshade: 0,3 kg / 0.7 lb

- White opal glass lampshade: 0,6 kg / 1.3 lb

REGULATIONS

CE



UNE-EN 60598

UNE-EN 55015

UNE-EN 62031

UNE-EN 61000-3-2

UNE-EN 60529

UNE-EN 61347-2-13



Non - class 2

Dry location only

UL-1598

UL-8750

E-336377

MAINTENANCE

Clean with a smooth cloth. Do not use ammonia, solvents or abrasive cleaning products..

OTHERS

The lamp are delivered in one package.


The assembly instructions are delivered with the product.




LAMPSHADES




CIRIO CHANDELIER S MODEL

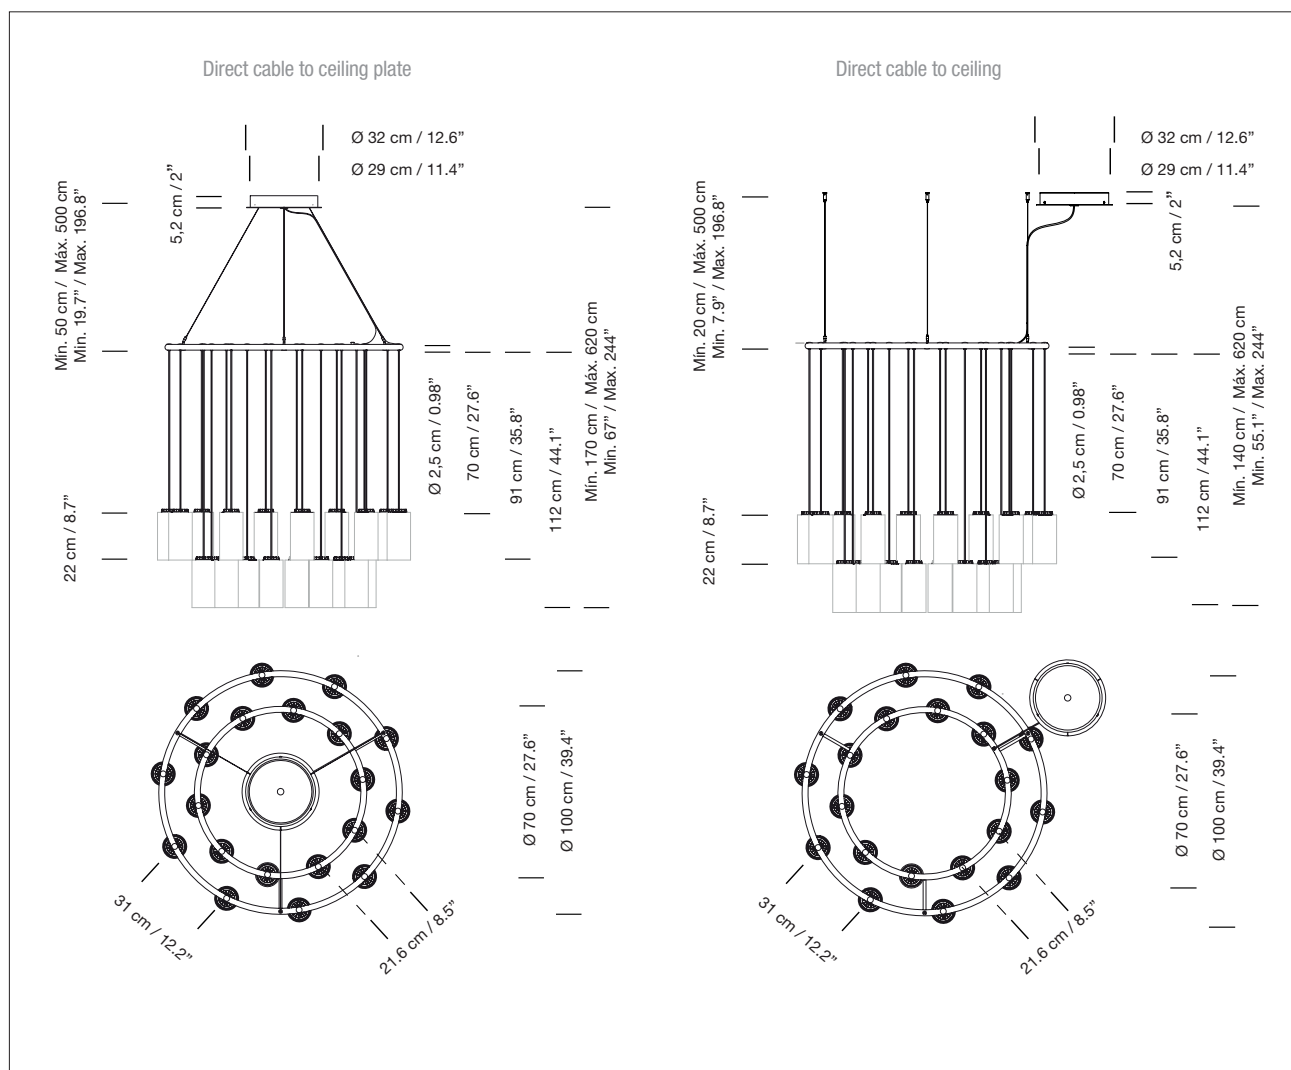


CIRIO CHANDELIER M MODEL

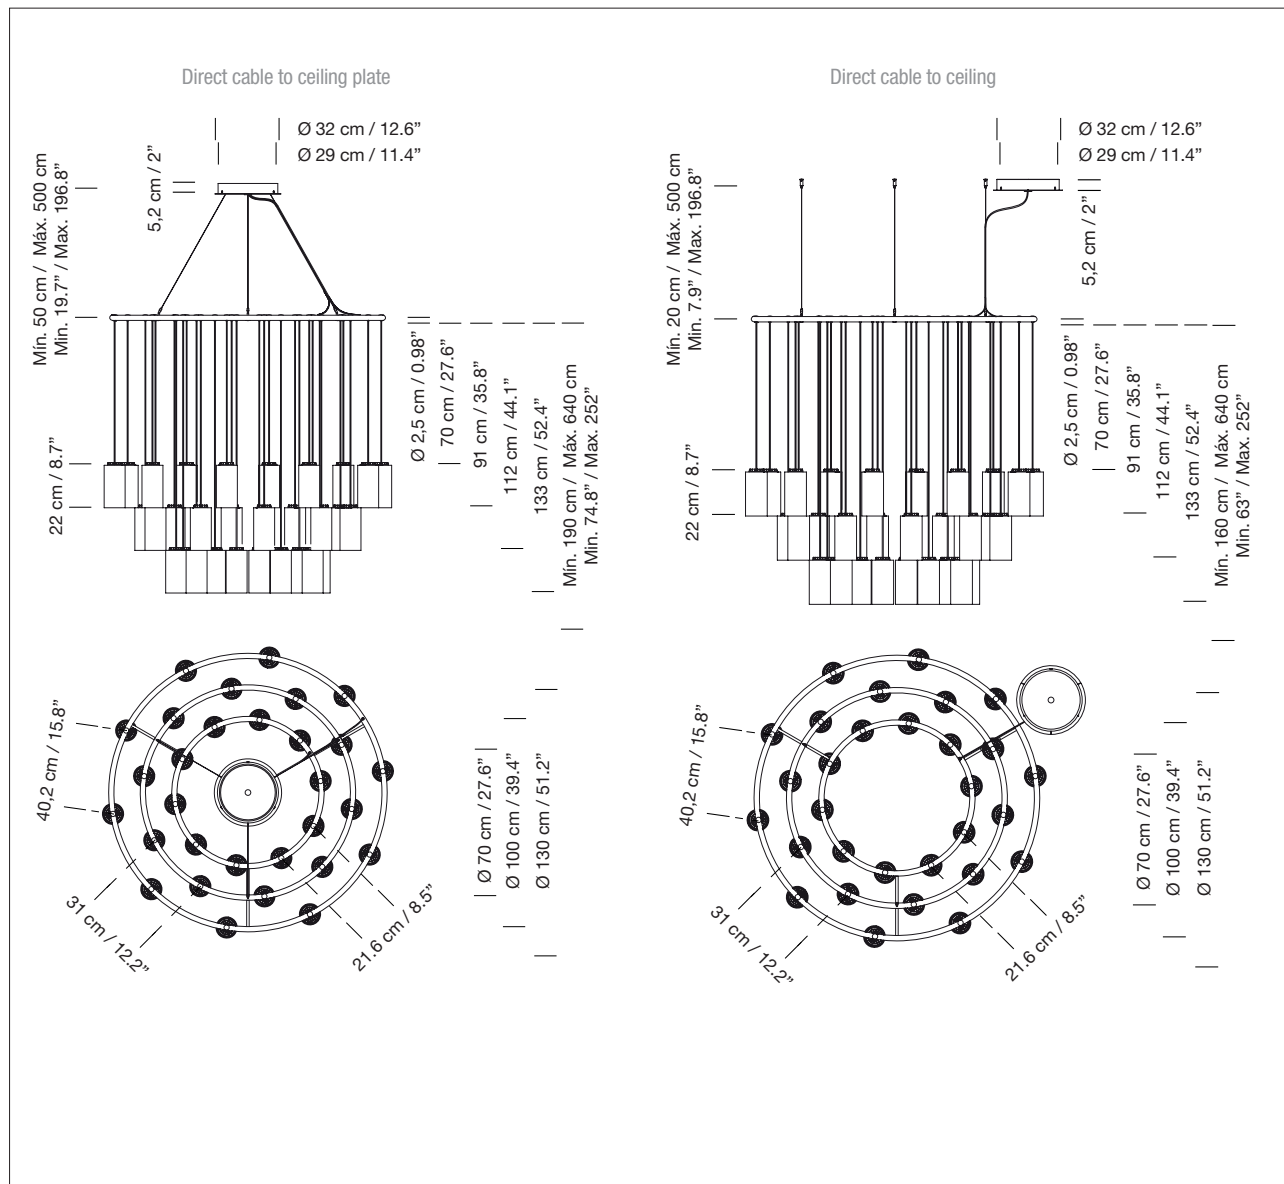

CIRIO CHANDELIER L MODEL

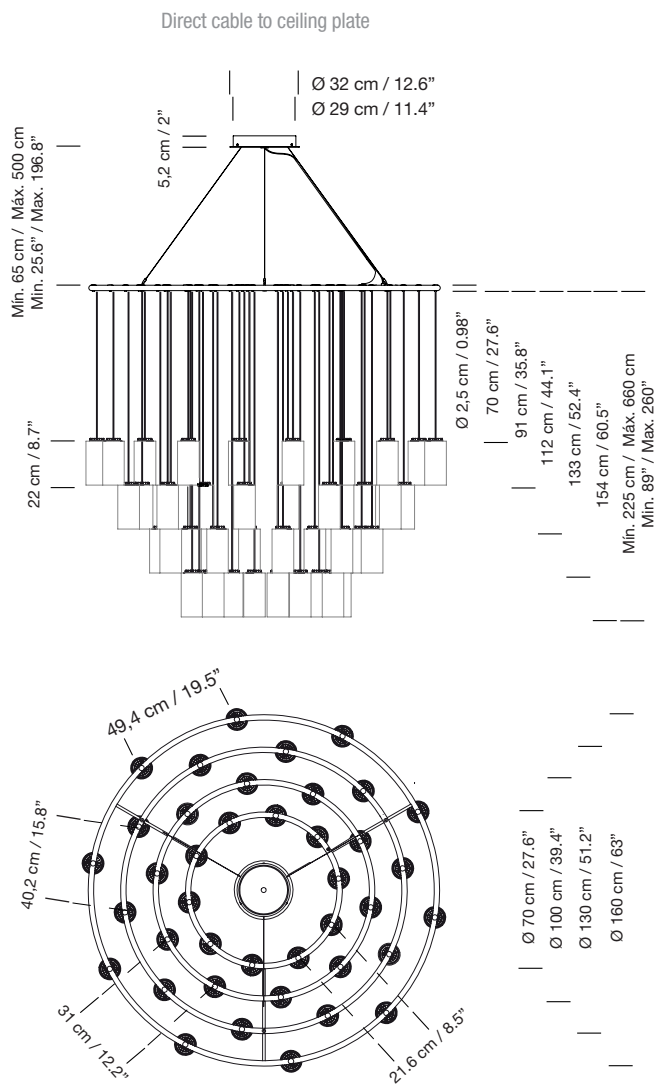

CIRIO CHANDELIER L MODEL

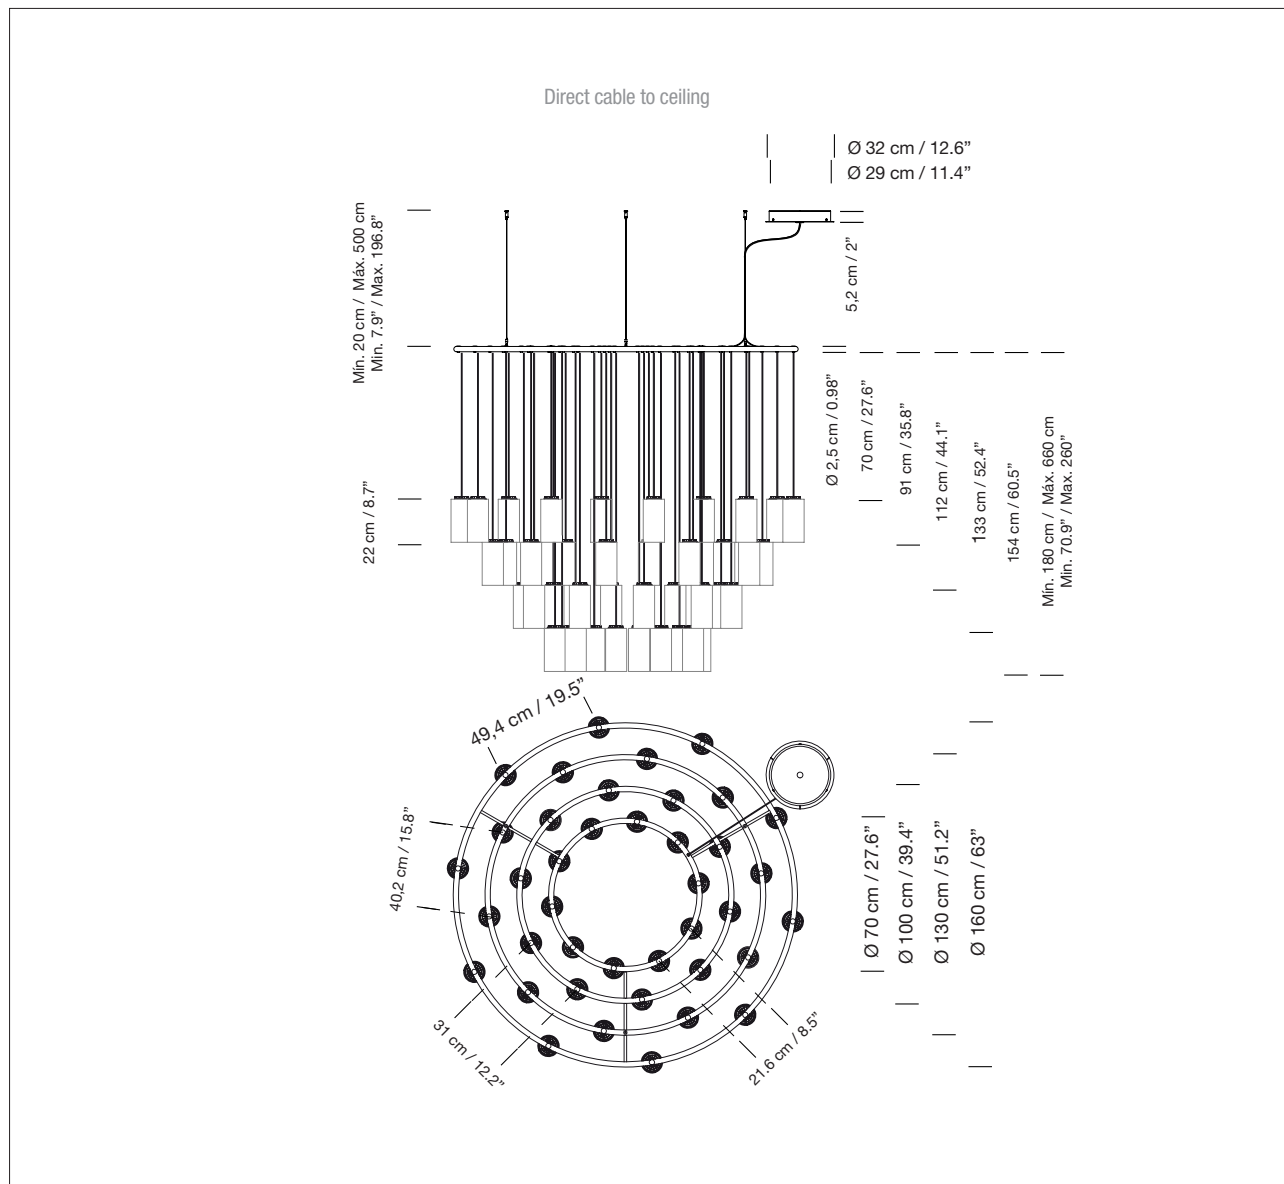

Collection

Hanging Lamps



Cirio Simple



Cirio Múltiple



Cirio Circular



Cirio Lineal



Cirio Oval